





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT
FRRF2412	2.09 LB/EACH (948g/EACH)

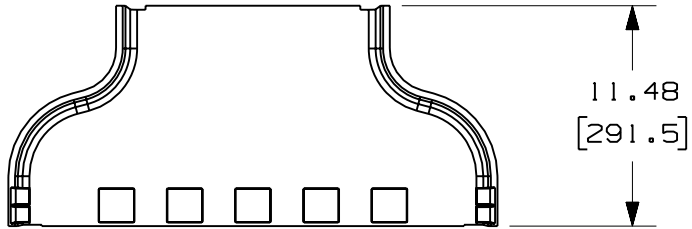

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 24x4 TO FIBERRUNNER 12x4 REDUCER IS DESIGNED WITH A MINIMUM 3" (76.2) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

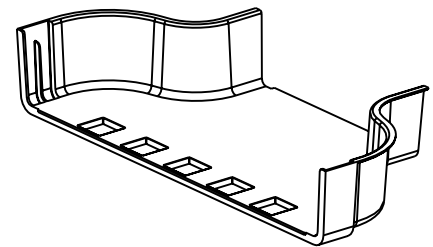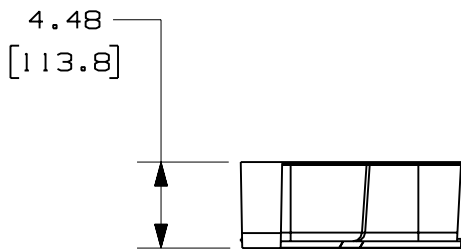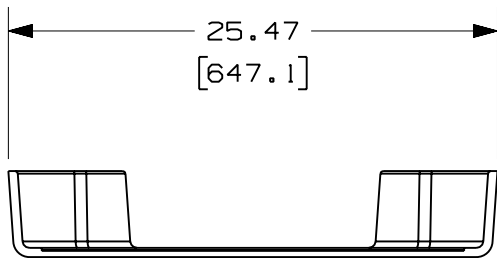

ENG. REF.: D39701CM_DC/00 FRRF2412

CAD FILENAME/LAYERS		FRRF2412.pdf	
<h1>PANDUIT</h1> CORP TINLEY PARK, ILLINOIS FIBERRUNNER 24x4 TO FIBERRUNNER 12x4 REDUCER (FRRF2412) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± .03 (.8) ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY MSO	MAT'L: ABS	SCALE NONE	DWG A
DATE 10-21-08	CHK'D SL	DRAWING NO. 39701-21	SIZE A

R	10-21-08	MSO	SL	RELEASED TO PRODUCTION	39701-21	RN	RN			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	GMBH	