

# LP SERIES | MODEL LP35

LOW PROFILE INCREMENTAL OR ABSOLUTE ENCODER



#### **Features**


- Low profile package saves space
- Excellent resistance to shock and vibration
- 30mm standard through shaft, PEEK reduction hub available
- High protection level of IP66
- High performance in temperatures from -40°C to +100°C
- Resolutions up to 10,000 PPR, incremental or 16 BITS absolute
- Terminal box, M12 or cable output terminations
- Encapsulated electronics
- TTL and HTL electronics
- Reinforced electrical output available on some incremental and absolute models
  - Wiring fault tolerant with terminal box connection
  - Long cable drive capability

#### Mechanical

Housing Size	Standard: Ø 90mm X 26mm deep Terminal Box: 128mm tall X 116mm wide X 25mm deep. (See dimensional drawings for detail)					
Shaft Size	Hollow Shaft: Ø 1/2" to Ø 1" blind or through Solid Shaft: Ø12 mm x 20 mm with keyway, Ø 3/8"x 7/8" with flat Hollow Shaft w/ Integrated Coupling: 14mm, 20mm, 1/2", 3/4"					
Permissible Shaft Loads	Axial: 40 N Radial: 80 N					
Shaft Runout	Hollow Shaft: 0.1 mm [0.004"] TIR Solid Shaft: 0.02 mm [0.001"] TIR Hollow Shaft w/ Integrated Coupling: N/A					
Static/ Dynamic Torque	30 / 300 mN.m [4.2/ 42 oz-in] @ 25°C					
Bearings	6807 - Sealed					
Material	Cover: Clear anodized aluminum  Body: Clear anodized aluminum  Shaft: AISI 303 stainless steel					
Bearing Life L <sub>10</sub> h (Theoretical Mechanical Lifetime)	> 18.10 <sup>9</sup> turns / 100000 hours					
Continuous Max. Speed	6000 RPM, (Reference Chart 1. Speed vs Temperature)					
Shaft Moment of Inertia	< 84000 g.mm <sup>2</sup> [11.9 x 10 <sup>-3</sup> oz*in*sec <sup>2</sup> ]					
Weight (approx.)	Terminal Box: 790g M12 or cable: 450g					
	Page 1					




Chart 1. Speed vs Temperature (Temperature on this chart to be added to ambient temperature. Do not exceede maximum temperature on datasheet.)

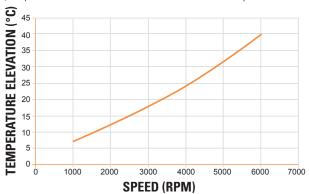


# Cable or M12 Connection Shaft Options









Through Hollow Shaft

**Blind Hollow Shaft** 

Shaft with Integrated coupling

Solid Shaft

# Electrical

	Absolute	Incremental				
Output Format	SSI compatible (RS422)	Two channels in quadrature + index and complements				
Resolution	Up to 16 BITS	Up to 10,000 CPT				
Encoder Accuracy	±	0.1°				
Supply Voltage Vcl	5-30 Vdc	<b>Cable or M12</b> : 5-30V (28/V) and 4.75-30V (28/5) <b>Terminal Box</b> : 11-30V (28/VR),5-30V (28/V) and 4.75-30V (28/5)				
Supply Current (No Loads)	75mA Typ	<b>Cable or M12</b> : 75mA <b>Terminal Box</b> : 100mA (28/VR), 75mA (28/V and 28/5)				
Current Per Channel Pair	40mA max	<b>Cable or M12</b> : 40mA <b>Terminal Box</b> : 60mA (28/VR), 40mA (28/V and 28/5)				
Voltage / Output	<b>28/SI:</b> SSI RS485 w/o parity <b>28/SR:</b> SSI RS485 reinforced w/o parity Terminal Box version only	<b>28/V:</b> Line driver 5-30 V In/Out; PushPull <b>28/5:</b> Line driver with 5 V (TTL) regulated output <b>28/VR:</b> Push Pull 11-30V reinforced. Terminal Box version only				
Short Circuit Proof	<b>28/SI</b> : Yes (except to V+) <b>28/SR</b> : Yes	Cable or M12: Yes (28/V) and Yes (except to VcI) (28/5) Terminal Box: Yes (28/VR), (28/V) and (28/5) except to VcI				
Reverse Polarity Tolerant	,	Yes				
Wiring Fault Tolerant & Overvoltage Prot.	<b>28/SI:</b> No <b>28/SR:</b> Yes	Cable or M12: No Terminal Box: Yes Up to 60Vdc (28/VR) and No (28/V and 28/5)				
Frequency Response	Cable or M12: Up to 1MHz Terminal Box: Up to 300kHz (28/VR), Up to 1MHz (28/V and 28/5)					
Output Terminations	Cable, M12 or Terminal Box					
EMC	EN 61000-6-2 : 2005, see user manual for details EN 61000-6-4 : 2017 + A1 : 2011, see user manual for details					
Isolation	10	000V				

Page 2

#### Environmental

Protection Class (sealing)	IP66					
Temperature Range	<b>Cable or M12</b> : -40°C +100°C <b>Terminal Box</b> : -40°C +85°C (28/VR), -40°C +100°C (28/V and 28/5)					
Machanical Desistance	Shock	(EN60068-2-27): $\leq$ 3000m.s <sup>-2</sup> (5 ms, half sine) (300 G's)				
Mechanical Resistance	Vibration	$(EN60068-2-6)$ : $\leq 200 \text{m.s}^2 (55 \dots 2\ 000\ \text{Hz}) (20\ \text{G's})$				
Humidity	98% RH without condensation					




Waveform AA/ BB/ 00/ Channel B before A Clockwise (US convention is A leads B CCW)

#### Incremental Waveform

# INDEX GATED WITH A & B HIGH (CODE Q28) Z 90°




#### **INDEX GATED WITH B LOW (CODE 029)**



CW Rotation Viewing Shaft →


### Absolute SSI Waveform

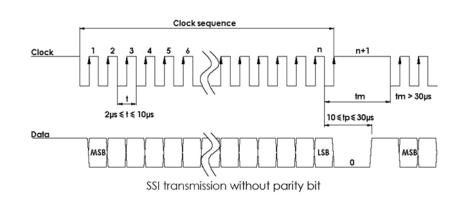





All dimensions are in millimeters [inches]

# Through hollow shaft

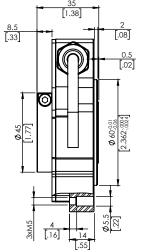

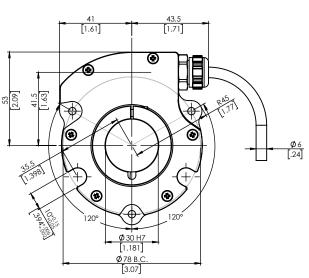







CHc: Hexagonal Socket head cap screws


NOTE:

HC: Hexagonal socket set screws

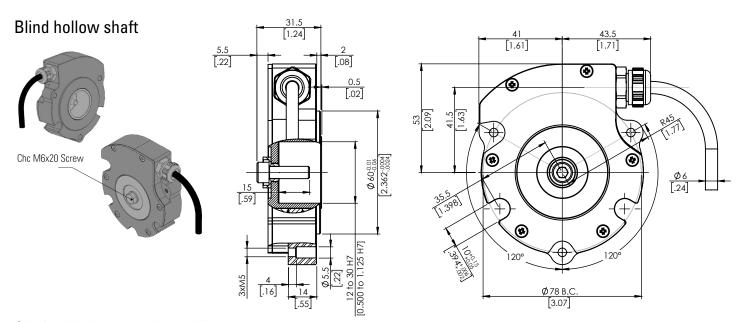

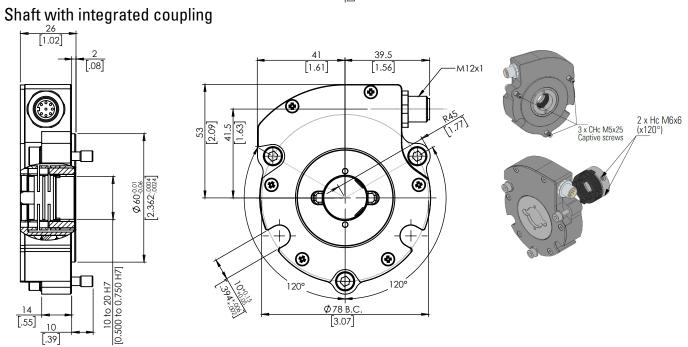


# Solid shaft

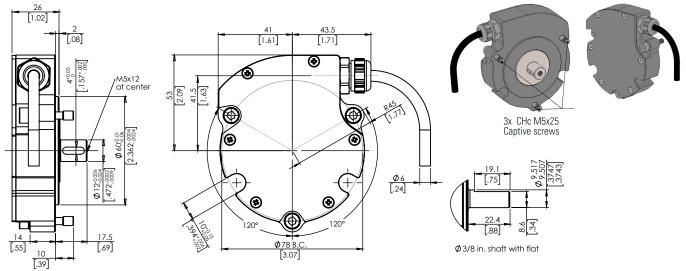


BEISENSORS


# TERMINAL BOX SHAFT OPTIONS

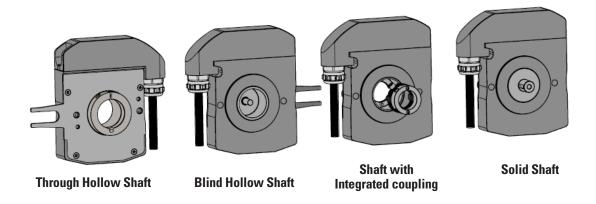



# Through hollow shaft

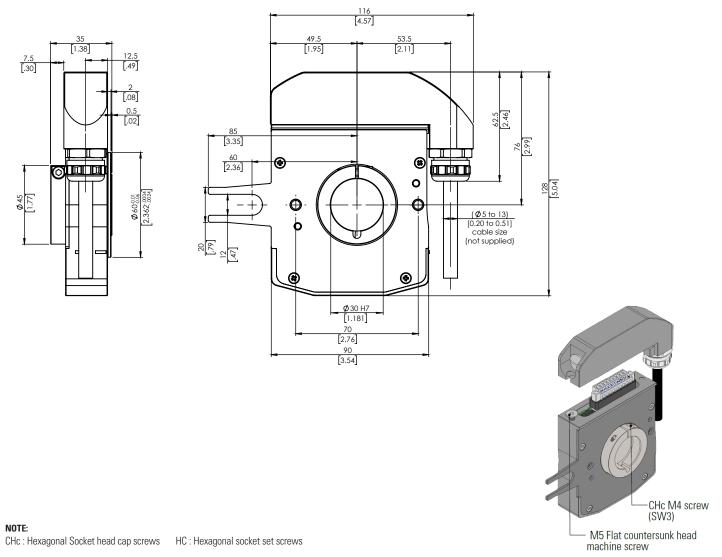


# Blind hollow shaft

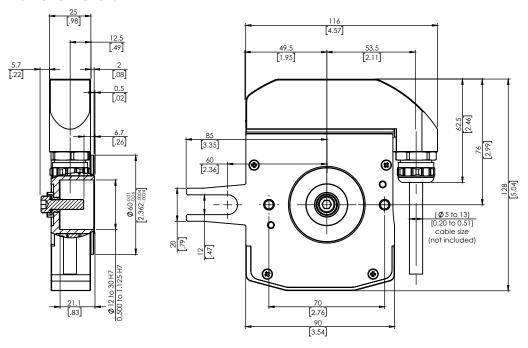







# Shaft with integrated coupling

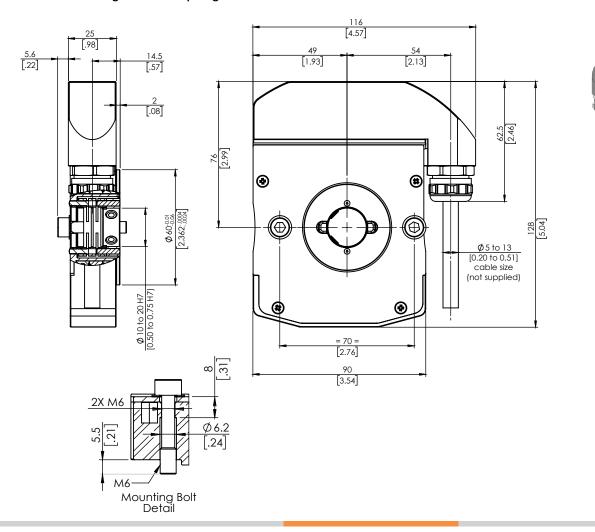

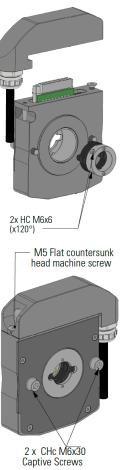


Page 6

# Solid shaft

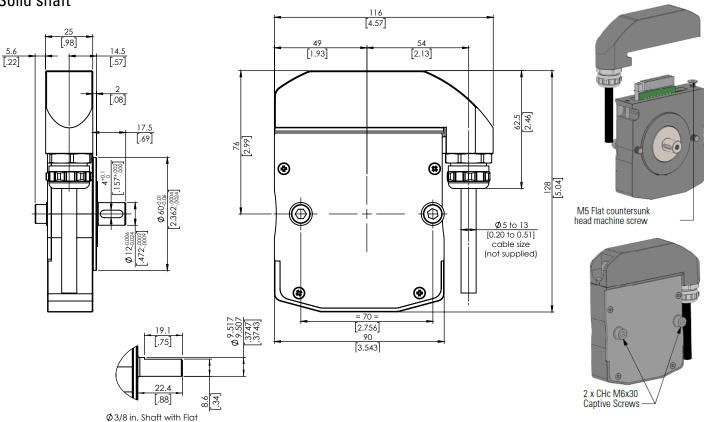

# TETHER OPTIONS FOR STANDARD CABLE OR M12 CONNECTOR

Other options available, consult factory. Tethers come with all the hardware shown.

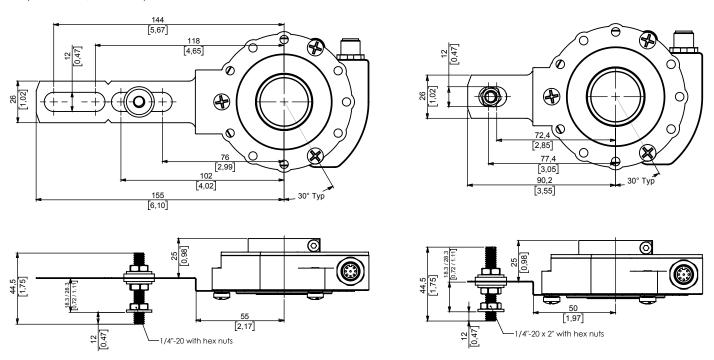



T2- Long tether arm with 1/4"-20 adj. hardware - M9445/053-02


T3-Short tether arm with  $\frac{1}{4}$ "-20 adj, hardware (fits 56C) – M9445/058-02



# TETHER OPTIONS FOR TERMINAL BOX OUTPUT

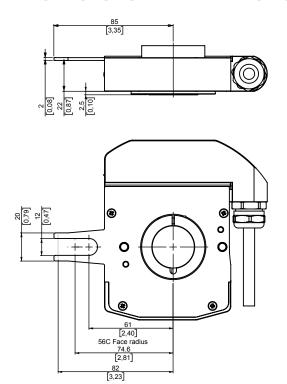



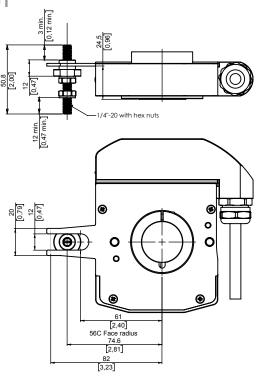

T5- M9445/059-01 Standard Fork + 56C Face Pin



# **TERMINATIONS**

## **Connection Incremental**

Termination	Connection Ordering Code	Description	-	+	А	В	Z	A/	B/	Z/	Case Ground
M12	M12	EUR M12 - 8 pins	1	2	3	4	5	6	7	8	Connector Body
Cable	SG	PVC Jacket	BLK	RED	YEL	BLU	ORN	WHT/ YEL	WHT/ BLU	WHT/ ORN	GRN
Terminal Box	T	Terminal box - 9 pins	1	2	3	4	5	6	7	8	9

Other cable types available- Consult factory

# Connection Absolute SSI

Termination	Connection Ordering Code	Description	-	+	Clk+	Clk-	Data+	Data-	Reset	NC	Case Ground
M12	M12	EUR M12 - 8 pins	1	2	3	4	5	6	7	N/A	Connector Body
Cable	SG	PVC Jacket	BLK	RED	BLU	WHT/ BLU	YEL	WHT/ YEL	ORN	N/A	GRN
Terminal Box	Т	Terminal box - 9 pins	1	2	3	4	5	6	7	8	9



# **STANDARD RESOLUTIONS**

### Incremental


32	64	100	128	250	256	360	500	512
600	720	1000	1024	1200	1250	1440	1500	2000
2048	2500	2880	3600	4096	5000	7200	8192	10000

#### **Absolute**

BITS	5	6	7	8	9	10	11	12	13	14	15	16
Counts	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536

For non-standard and resolutions above 10000 PPR, please contact factory

Page :

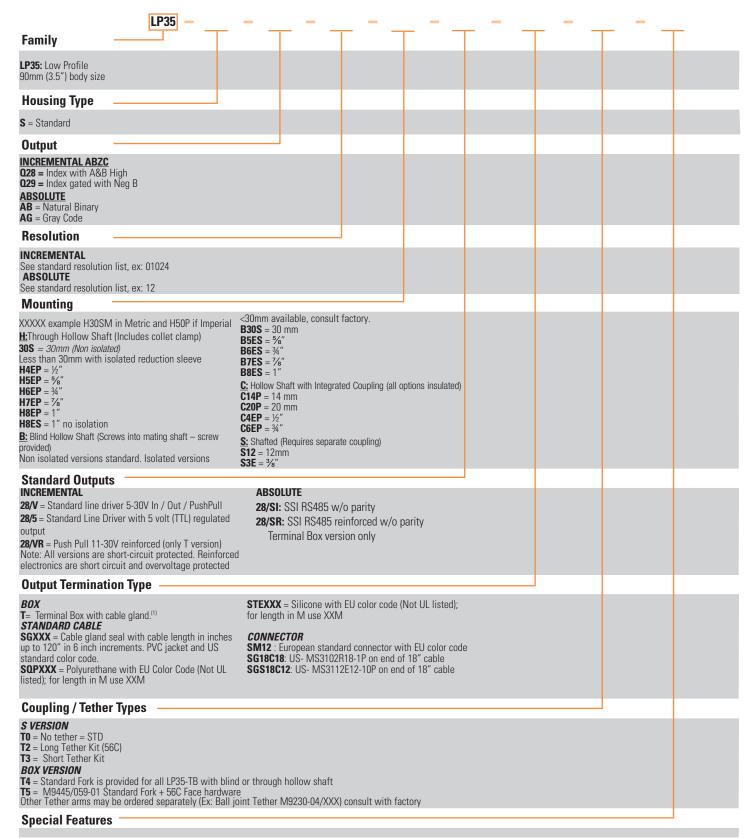

NOTE: (1)"T" Code changes the form from approximately 90mm (3.5") round to a rectangle that is approximately 128mm (5") high by 116mm wide (4.5")







These commodities, technology or software if exported from the United States must be in accordance with the Bureau of Industry and Security, Export Administration regulations. Diversion contrary to U.S. Law is prohibited.



(A) For detailed installation instructions and recommend screw torques refer to the User's Manual



The following accessories are included with your LP series encoder and defined by your part number selection.

Bore Reduction Sleeve	9418/H20 = 20 mm bore 9418/H8E = 1 in. bore 9418/H7E = 7/8 in. bore 9418/H6E = 3/4 in. bore 9418/H5E = 5/8 in. bore 9418/H4E = 1/2 in. bore 9418/H3E = 2/8 in. bore	Short Tether Arm Kit	M9455/058 = short tether, 8 x 1 mm rod M9455/058-01 = short tether, 3/8"-16 rod M9445/053-02 = short tether, 1/4"-20 rod
Integrated Coupling Kit (includes flex, hub and set screws)	M9410/009-14 = 14 mm M9410/009-20 = 20 mm M9410/009-E3 =1/4 in. M9410/009-E4 = ½ in. M9410/009-E6 = 5/8 in.	Tether Pin Kit	$M9445/059 = 10 \times 1.5 \text{ mm rod and}$ hardware $M9445/059-01 = 3/8"-16 \text{ rod and}$ hardware $M9445/059-02 = 1/4"-20 \text{ rod and}$ hardware
Long Tether Arm Kit	M9445/053 = long tether, 8 x 1 mm rod M9445/053-01 = long tether, 3/8"-16 rod M9445/053-02 = long tether, 1/4"-20 rod	Key for 12mm slot	9435/006 = 4X4X12 mm key

Page 10

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

### **CONTACT US**

+1 (800) 350 2727 - Option 1 sales.beisensors@sensata.com Europe, Middle East & Africa +33 (3) 88 20 8080 position-info.eu@sensata.com

sales.isasia@list.sensata.com China +86 (21) 2306 1500 Japan +81 (45) 277 7117 Korea +82 (31) 601 2004 India +91 (80) 67920890 Rest of Asia +886 (2) 27602006